



## InstaGen residential battery storage system (Low voltage)



The InstaGen battery - 5.12kWh modular in stack arrangement design to 20.48kWh.

Provides true energy independence

Reduces emissions

Reduces costs

Lifetime: 8,000 cycles

Modular design, stack for more energy

### Key features

- \* Minimalist design, practical and elegant
- \* IP65 Rating, suitable for outdoor and indoor installation
- \* Supports remote monitoring, diagnose and upgrade
- \* Ultra-convenient for installation and capacity expansion
- \* Highly modular design to meet different capacity demands
- \* Lifecycle: 8,000 cycles

### Guarantee


10 years

Enhanced guarantee on product

For InstaGen enquiries email [productsales@instagroup.co.uk](mailto:productsales@instagroup.co.uk)

# InstaGen residential battery storage system (Low voltage)

## Electrical Characteristics

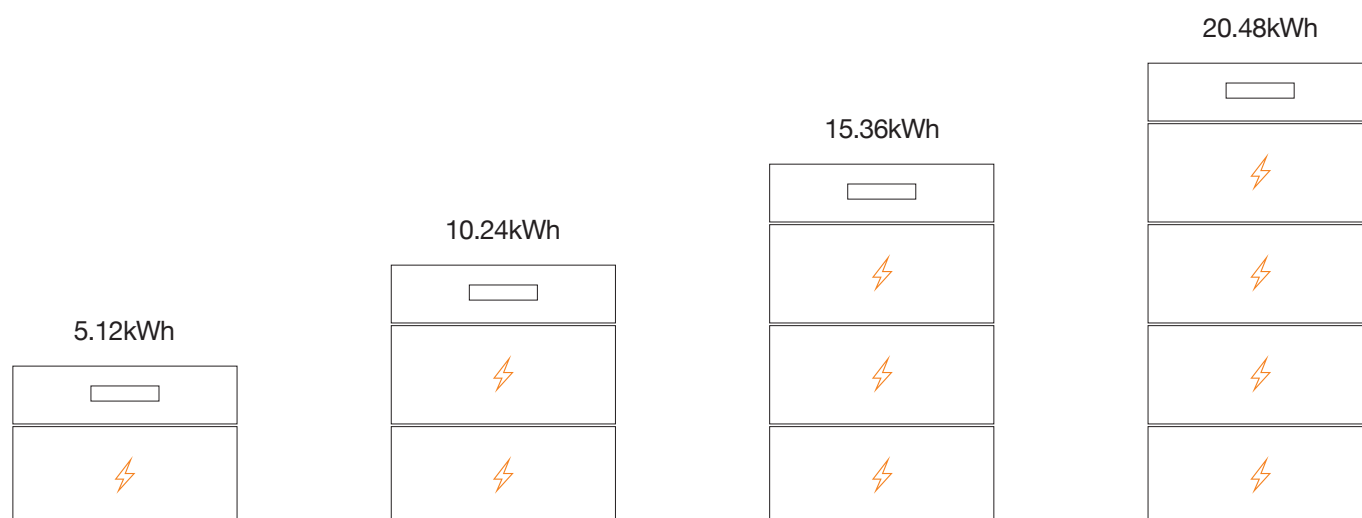

Model	LV05	LV10	LV15	LV20
Battery Type	LFP	LFP	LFP	LFP
Configuration	1P16S	2P16S	3P16S	4P16S
Rated Voltage	51.2V	51.2V	51.2V	51.2V
Rated Energy	5.12kWh	10.24kWh	15.36kWh	20.48kWh

Electrical Parameters	LV05	LV10	LV15	LV20
Voltage Range	44.8V-57.6V			
Rated Charging Current	50A	100A	150A	150A
Max. Charging Current	50A	100A	150A	150A
Rated Discharging Current	50A	100A	150A	150A
Max. Discharging Current	50A	100A	150A	150A

Mechanical Parameters	LV05	LV10	LV15	LV20
Weight	61.5kg	109.5kg	157.5kg	205.5kg
Dimensions (w*d*h)	665*200*503mm	665*200*770.7mm	665*200*1038.4mm	665*200*1306.1mm
IP Rating	IP65			
Cooling	Natural cooling			

Operating Conditions	LV05	LV10	LV15	LV20
Ambient Temperature	Charging: 0°C~50°C, Discharging:-10°C~50°C			
Operating Humidity	10~95%, RH			
Altitude	<2000m (derating<2000m)			
Mounting	Floor standing			
Cycle Life	8000 cycles			
Compliance	IEC62619/UN38.3			
Warranty	10 years			

For InstaGen enquiries email [productsales@instagroup.co.uk](mailto:productsales@instagroup.co.uk)